



Plug-In Cables

Cables

Connector

M12 Straight 3/4 Pole (Pin)

M12 90° Angled 3/4 Pole (Pin)

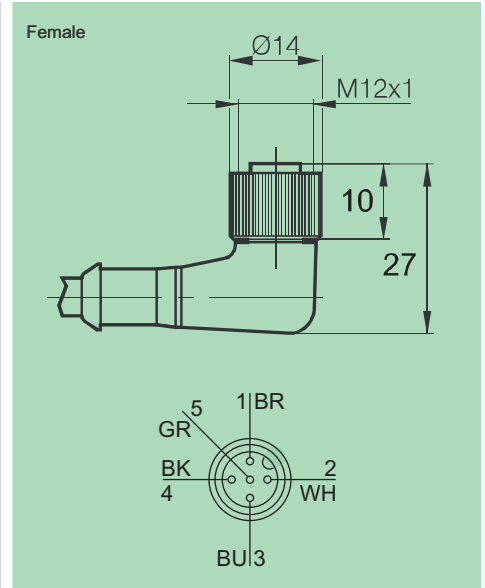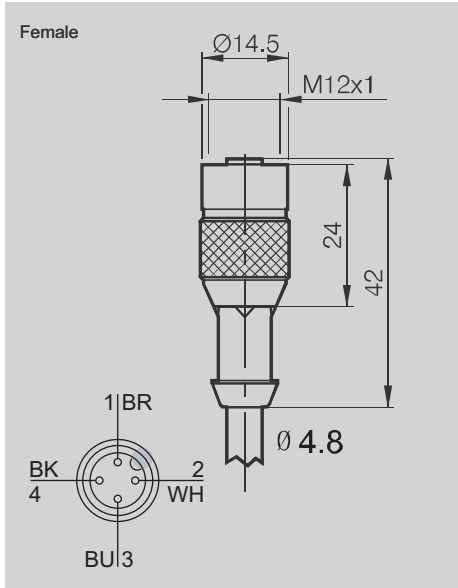

- DSS-CCS-M12-F4A-3M
- DSS-CCS-M12-F4A-5M
- DSS-CCS-M12-F4A-10M

- DSS-CCA-M12-F4A-3M
- DSS-CCA-M12-F4A-5M
- DSS-CCA-M12-F4A-10M

Cable Lengths Available	3 Meter, 5 Meter, 10 Meter	3 Meter, 5 Meter, 10 Meter
No. of Cores	16X0.15	16X0.15
Section of Each Core	3(4) X 0.3mm ²	3(4) X 0.3mm ²
Material (Cable/Injection)	PVC	PVC
Material (Pole/Pin)	Copper	Copper
LED Lamp	NO	NO
Rated Voltage	DC 12~220V	DC 12~220V
Resistance of Each Core	17.24 X 10 ⁻³ Ω	17.24 X 10 ⁻³ Ω
Installation Strength	>200 MΩ	>200 MΩ
IP Rating (Cable/Injection)	IP67/IP65	IP67/IP65