

2400

POWERKEY RELAY

Introducing the innovative POWERKEY RELAY 2400 Keypad. The PKR2400 is designed to allow full control directly from the keypad without the need for an additional controller.

Connection is made simple via three Deutsch plugs and buttons can easily be programmed for momentary, toggle or scroll functions.

Programming and software updates to the PKR2400 are made effortlessly through a 615UTC USB to CAN adapter.

The POWERKEY RELAY 2400 is able to intergrate vehicle CANbus allowing for enhanced functionality and flexibility, making it the ideal choice for all applications.

STANDARD FEATURES:

- Large 24mm Diameter Inserts
- Relegendable Buttons
- Full RGB Colour Illumination for each key
- Multicolour Indicator Rings
- LED Backlit Icons



 **Googolplex** Electric Co.

FLEXIBLE - SMART - RUGGED

Unit 3/15 Parramatta Rd, Underwood QLD, AUSTRALIA 4119 | PO Box 1301, Slacks Creek QLD, AUSTRALIA 4127 | P +61 (0)7 3290 3116 | E sales@googolplex.com.au

Page 1: GEC-PKR2400_SpecSheet_Ver.1

FEATURES

- 8 button fully sealed keypad
- 8 automotive relays (2 @ 12A max, 6 @10A max)
- Continuous total current is rated up to 40A max
- Monitoring of relay contacts for visual fault indication
- Unused NO connections from relays can be used as active high inputs (active low would require an external pull up to positive battery reference)
- Monitoring of load current through relay with 0.1A accuracy
- Uses ESC firmware that allows custom C scripting of behaviours to run autonomously in keypad without need for an additional controller
- ECS scripting can set thresholds for over or low current conditions on individual relays
- ECS scripting allows timers to cycle relays ON & OFF at customisable rates
- ECS scripting allows sequencing where a single remote command or key press could trigger multiple relays
- Input voltage from 9-32 VDC
- EMI/EMC tested

PIN-OUTS



DT04-4P PIN-OUT

Wire	Pin	W/Colour	Function
W3	1	GREEN	VIN
W4	2	YELLOW	GROUND
W5	3	BLACK	CAN H
W6	4	RED	CAN L



DT06-08SA PIN-OUT


Wire	Pin	W/Colour	Function
W17	1	RED	Relay 1 COM
W19	2	RED	Relay 1 COM
W23	3	RED	Relay 1 COM
W24	4	RED	Relay 1 COM
W22	5	RED	Relay 1 COM
W21	6	RED	Relay 1 COM
W29	7	RED	Relay 1 COM
W30	8	RED	Relay 1 COM




DT06-08SB PIN-OUT

Wire	Pin	W/Colour	Function
W18	1	BLUE	Relay 1 NO
W20	2	BLUE	Relay 1 NO
W27	3	BLUE	Relay 1 NO
W28	4	BLUE	Relay 1 NO
W26	5	BLUE	Relay 1 NO
W25	6	BLUE	Relay 1 NO
W31	7	BLUE	Relay 1 NO
W32	8	BLUE	Relay 1 NO

DIMENSIONS

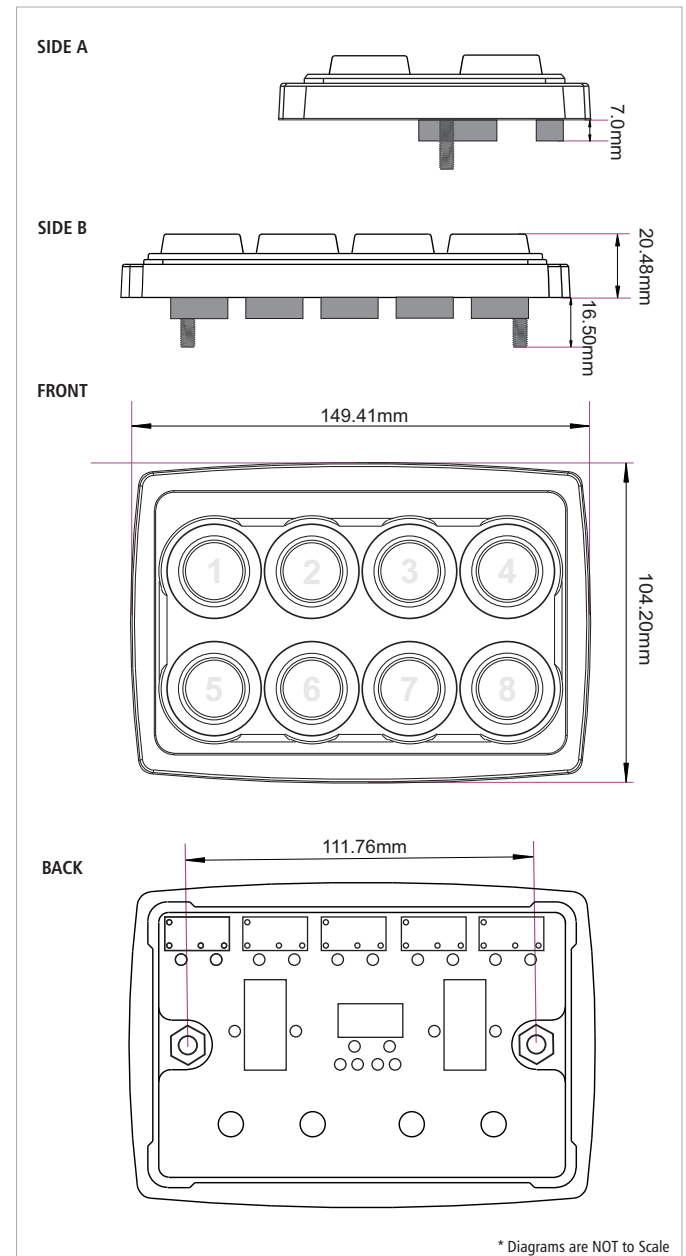

RELAY ARRANGEMENT

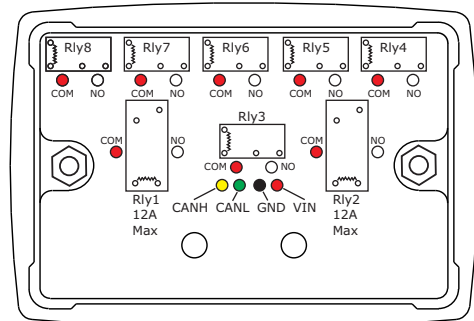

MOUNT ON A FLAT SURFACE ONLY

Part Number:	DSS-PKR2400
Nut Size*:	10-32 UNF S/S
Washer Sizes:	M5 Spring Washer S/S, M5 Flat Washer S/S
Torque Maximum:	7 +/- 1 in. lbs

* DO NOT USE NYLOC NUTS

